

2 way Power Splitter 700-2700MHz DIN-Female

Features:


- Multiple-Band Frequency Ranges
- High Power Rating 300 Watt
- Low PIM, Low VSWR
- High quality cavity type, High reliability



Specification:

Product Type	2-way Splitter
Model Number	PS2-0727-D300
Frequency Range	698 – 2700MHz
Insertion Loss	≤0.2dB
VSWR	≤1.2
PIM (IM3)	<-150dBc @2x43dBm
Power Handling	300W
Impedance	50Ω
Connector Type	DIN-Female
Applied Environment	Indoor / Outdoor
Relative Humidity	5 to 95%
Operating Temperature	-25 to +70°C
Protection class	IP65
Material	Cavity: Aluminum; Connector: Copper
Processing	Silver plated inner conductor
Dimension	270.6*64.2*25mm

Product Drawings:

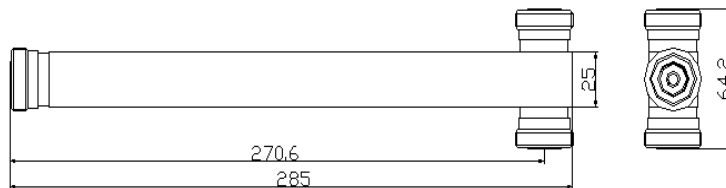

EMTS Telecom Services Ltd. offers a comprehensive portfolio of enhanced coverage solutions for the Wireless Networks, Based on advanced technologies. EMTS proven, indoor and outdoor solutions solve a wide range of network challenges including interference and oscillation problems, challenging coverage holes, rapid response deployment and inadequate in-building coverage. Regardless of the technology or frequency, EMTS can provide customized coverage solutions that address any combination of unique and complex network needs for the Wireless Networks.

