EMTS Telecom Services

TURNING TECHNOLOGY INTO SOLUTIONS

23dBm 900-1800-2100MHz MIMO Tri-Band Fiber Optic Remote Unit

Model No: RU-91821-23W35-M

Features:

- Multi-Band Support: Operates on 900 MHz, 1800 MHz and 2100 MHz FDD bands, enabling multi-operator network deployment
- MIMO: One Remote Unit supports MIMO in 1800/2100MHz bands
- Efficient Fiber Utilization: Transmits Tx/Rx control and alarm signals over a single fiber optic cable
- Star Topology: One Master Unit (MU) can connect up to four Remote Units (RUs), maximizing fiber cable efficiency
- Output Power: Delivers up to 23 dBm composite power, compliant with ETSI standards for GSM, WCDMA, and LTE
- High MTBF: Designed for long-term, continuous operation with a mean time between failures (MTBF) exceeding 100,000 hours
- Standards Compliance: Fully compliant with 3GPP and ETSI standards, and meets CE requirements
- Wide Operating Temperature Range: Reliable performance from -40 °C to +55 °C
- Easy Installation and Maintenance: Simplified field installation and serviceability reduce rollout time and operational costs
- Loss Compensation: Compensates for insertion loss in passive components and transmission loss in feeder cables
- Compact and Robust Design: High-performance system housed in a waterproof enclosure suitable for indoor and outdoor installations
- Flexible Mounting: Remote Unit designed for wall mounting; Master Unit designed for standard 19-inch rack installation
- Local and Remote Management: USB port enables local connection to a laptop for monitoring; integrated IP-based NMS allows remote supervision and parameter downloads via Ethernet

EMTS Telecom Services offers a comprehensive portfolio of enhanced coverage solutions for the Wireless Networks, Based on advanced technologies. EMTS proven, indoor and outdoor solutions solve a wide range of network challenges including interference and oscillation problems, challenging coverage holes, rapid response deployment and inadequate in-building coverage. Regardless of the technology or frequency, EMTS can provide customized coverage solutions that address any combination of unique and complex network needs for the Wireless Networks.

EMTS Telecom Services

TURNING TECHNOLOGY INTO SOLUTIONS

Introduction

EMTS Telecom Services Ltd. Fiber Optic Repeater System is a highly reliable and proven solution for extending and improving the coverage of 900/1800/2100 MHz telecommunication networks. The system is composed of two main modules: the Master Unit (MU) and the Slave Fiber Remote Unit (RU). A single Remote Unit supports MIMO in 1800 ,2100 MHz bands.

The Master Unit can be directly connected to the BTS or integrated with an RF repeater that receives the BTS signal. The Remote Unit delivers enhanced signal coverage within the designated service area.

The EMTS Fiber Optic Repeater System amplifies signals in both uplink and downlink directions over a continuous, factory-tuned bandwidth. Its robust design, easy deployment, and straightforward field maintenance significantly reduce operational costs and ensure high reliability with an extended mean time between failures (MTBF).

This cost-effective and scalable solution is ideal for extending reliable mobile coverage in challenging environments such as subways, tunnels, large indoor facilities, and complex outdoor distribution scenarios.

Application Diagram

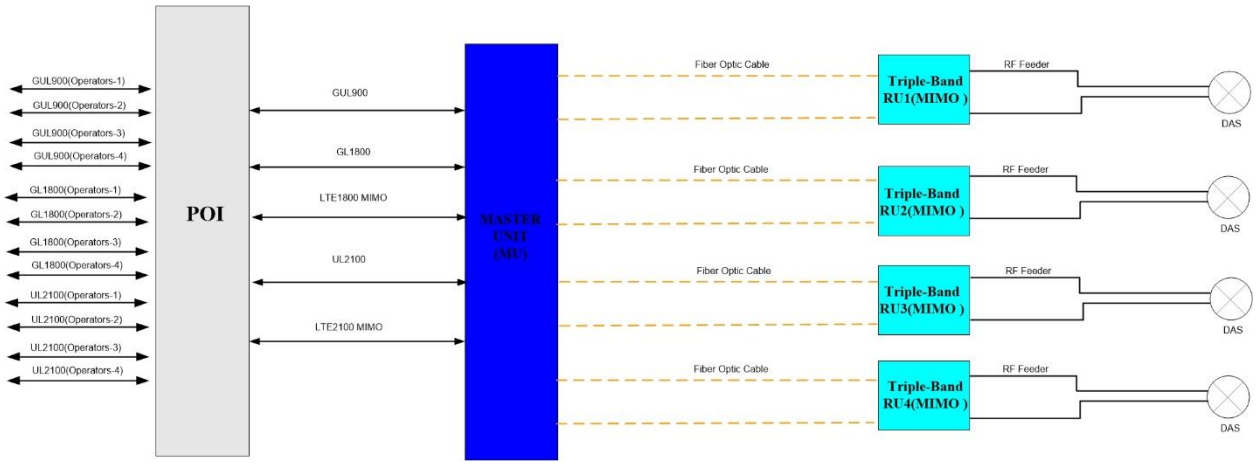

About EMTS Telecom Services Ltd.:
EMTS is a leading supplier of high-quality RF coverage solutions designed to maximize wireless network coverage in difficult RF environments and complex settings. The company specializes in extending RF radio coverage to rural areas, office buildings, subways, tunnels and shadowed areas. The EMTS coverage solution supports all major mobile technologies and standards of wireless Networks.

All rights reserved ® Specifications are subject to change without notice

EMTS Telecom Services

TURNING TECHNOLOGY INTO SOLUTIONS

Technical Specifications:

		Remote Unit Specifications		
Electrical Specifications				
System		**EGSM/UMTS900**	**2xLTE1800**	**2xLTE2100**
Frequency Range	**Uplink**	880~915MHz	2x1710~1785MHz	2x1920~1980MHz
	Downlink	925~960MHz	2x1805~1880MHz	2x2110~2170MHz
Bandwidth		2x35MHz	2x75MHz	2x60MHz
Maximum Input Power (Non-Destructive)		10 dBm		
Composite DL RF Output Power		23±2dBm Per Band		
Gain of RU		35±3dB Per Band		
Gain Adjustment Range		0~20B @ Step of 1 dB		
AGC		≥10dB		
VSWR		≤1.5		
Spurious Emission		9KHz~1GHz: ≤ -36dBm		
Spurious Emission		1GHz~12.75GHz: ≤ -30dBm		
System Delay		≤2us		
I/O Impedance		50Ω		
Optical Output Power		0±3dBm@1310nm		
Fiber Type/Number		Single mode		
Optical Receiver Sensitivity		≥ -12dBm		
Optical Connector Type		2*FC/APC (1 Port for SISO and 1 Port for MIMO)		
RF Connector Type		2*N-Female(1 Port for SISO and1 Port for MIMO)		
Power Supply		AC220V, 50/60Hz		
Power Consumption		≤70W		
Environmental Specifications				
Ingress Protection		Indoor (IP40)		
Operating Temperature		-10°C ~ + 45°C		
Relative Humidity		≤ 95% (Non Condensing)		
Cooling		Passive		

EMTS Telecom Services offers a comprehensive portfolio of enhanced coverage solutions for the Wireless Networks, Based on advanced technologies. EMTS proven, indoor and outdoor solutions solve a wide range of network challenges including interference and oscillation problems, challenging coverage holes, rapid response deployment and inadequate in-building coverage. Regardless of the technology or frequency, EMTS can provide customized coverage solutions that address any combination of unique and complex network needs for the Wireless Networks.

Mechanical Specifications	
Dimensions	361*265*113mm
Weight	≤13kg
Mounting Type	Wall or Pole Mounting
Local and Remote-Control Specifications	
LED Indicator	Power Supply, Running, Alarm
Local Control	Via USB Interface
Remote Monitoring	Through MU via Fiber Optical Cable
Comply with Standards	
Safety	EN 62368-1 General, EN 50385 General
EMC	EN 301 489-1, EN 301 489-50
Radio	ETSI - ETSI EN 303 609 & ETSI EN 301 908-11 3GPP - 3GPP TS 36.143 & 3GPP TS 36.106
CE	Compliant with relevant EU directives

About EMTS Telecom Services Ltd.:
EMTS is a leading supplier of high-quality RF coverage solutions designed to maximize wireless network coverage in difficult RF environments and complex settings. The company specializes in extending RF radio coverage to rural areas, office buildings, subways, tunnels and shadowed areas. The EMTS coverage solution supports all major mobile technologies and standards of wireless Networks.

All rights reserved ® Specifications are subject to change without notice